

ORTALDA HERMANOS Y COMPAÑIA

POLEAS SINCRONICAS



3/8" (L)



SERVICIO LIVIANO

Z	Diámetro Primitivo	Diámetro Exterior	Diámetro Exterior c/pestaña	Diámetro de la Maza (H)	Agujero Mínimo	Agujero Máximo	Ancho correa 1/2" (L 050)		Ancho correa 1" (L 100)	
							W	L	W	L
10	30,33	29,57	36,51	20	12	12	19	32	32	45
12	36,37	35,61	42,86	24	12	12	19	32	32	45
14	42,44	41,68	49,21	26	12	13	19	32	32	45
16	48,51	47,75	53,98	36	12	18	19	32	32	45
17	51,54	50,77	57,94	36	12	18	19	32	32	45
18	54,82	53,82	60,33	36	12	18	19	32	32	45
19	57,61	56,85	63,50	40	12	22	19	32	32	45
20	60,63	59,87	66,68	40	12	22	19	32	32	45
21	63,68	62,92	69,45	46	12	23	19	32	32	45
22	66,70	65,94	73,03	46	12	23	19	32	32	45
24	72,77	72,01	79,38	50	12	28	19	32	32	45
26	78,84	78,08	85,73	55	12	30	19	32	32	45
28	84,89	84,12	92,08	58	12	30	19	32	32	45
30	90,96	90,20	96,84	58	12	30	19	32	32	45
32	97,03	96,27	103,19	58	12	30	19	32	32	45
36	109,14	108,38	115,09	65	15	37	19	32	32	45

1/2" (H)

SERVICIO PESADO

Z	Diámetro Primitivo	Diámetro Exterior	Diámetro Exterior c/pestaña	Diámetro de la Maza (H)	Agujero Mínimo	Agujero Máximo	Ancho correa 1" (H 100)		Ancho correa 2" (H 200)	
							W	L	W	L
14	56,59	55,23	62,71	40	15	22	34	45	60	75
16	64,67	63,30	70,64	45	15	23	34	45	60	75
18	72,77	71,40	79,38	55	15	30	34	45	60	75
19	76,81	75,44	82,55	60	15	32	34	45	60	75
20	80,85	79,48	86,92	60	15	32	34	45	60	75
21	84,89	83,52	90,88	65	15	37	34	45	60	75
22	88,93	87,55	95,25	70	15	38	34	45	60	75
24	97,03	95,66	103,19	75	15	43	34	45	60	75
26	105,11	103,73	111,13	80	15	48	34	45	60	75
28	113,18	111,81	119,06	80	15	48	34	45	60	75
30	121,29	119,91	127,00	80	15	48	34	45	60	75
32	129,36	127,99	135,33	80	15	48	34	45	60	75

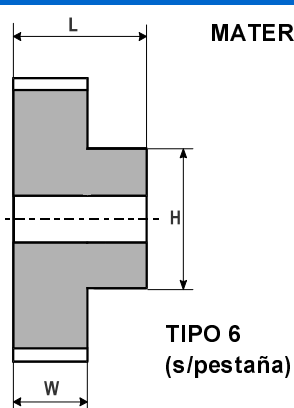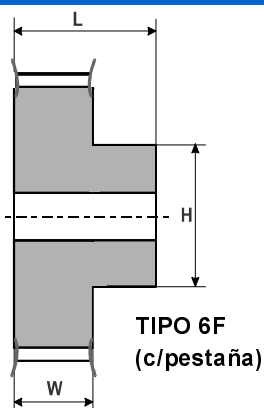

MATERIAL SAE 1045

